

60x120cm 2.0CM GLAZED PORCELAIN TILES

Collection 2023



The symbolizes Simplicity and Comfort of your space, we design this unique and mesmerizing collection.












Antique White

Random 05





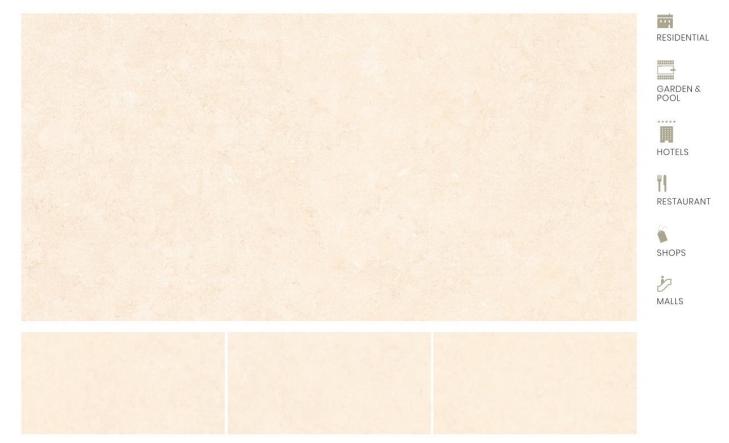





MATT SURFACE




Biscuit Grey

Random 05





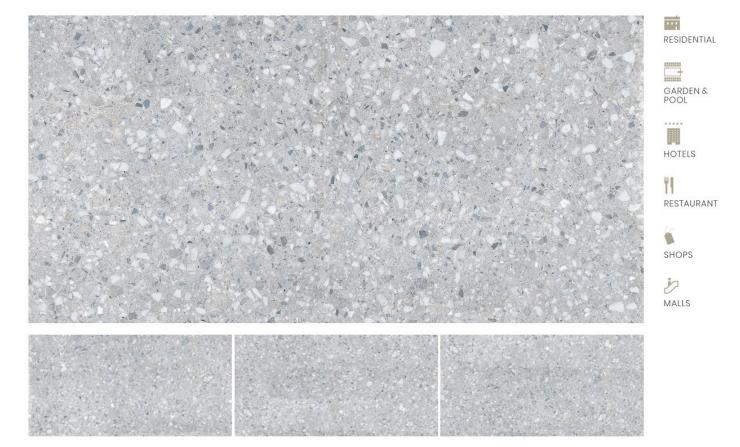

Chepo Grey

Random 04







Chepo Milk

Random 04








Camlin Bianco

Random 03

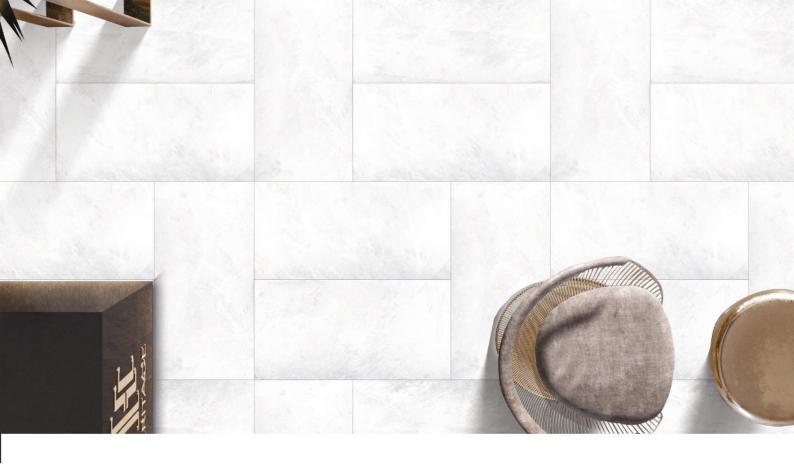





Random 04










Pacific Grey

Random 04





MATT SURFACE

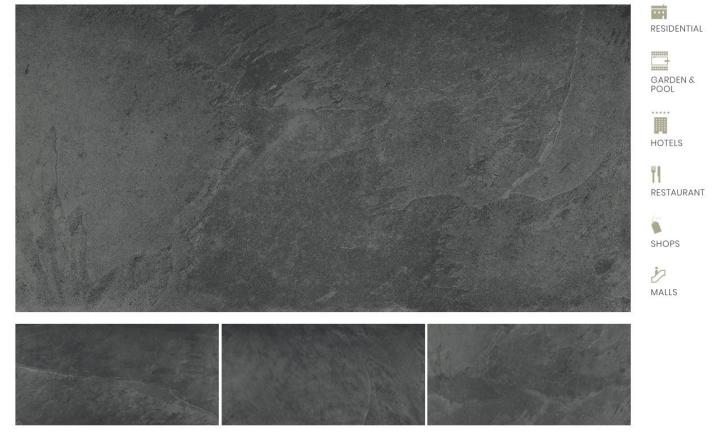

Station Black

Random 08







Station White

Random 09







Volga Silk Random



TECHNICAL SPECIFICATIONS 60X120CM

CHARACTERISTICS		STANDARD AS PER ISO-13006/EN 14411 GROUP BIA		ALUE OF F GPT	TEST METHOD
REGULATORY PROPERTIES					
Deviation in length & width		± 0.5%	± 0.1%		ISO-10545-2
Deviation in thickness		± 5.0%	± 4.0%		ISO-10545-2
Straightness of sides		± 0.5%	± 0.1%		ISO-10545-2
Rectangularity		± 0.5%	± 0.1%		ISO-10545-2
Surface flatness		± 0.5%	± 0.2%		ISO-10545-2
Colour difference		Unaltered	No Cha	inge	ISO-10545-16
Glossiness		As per mfg.	Min. 49	6	GLOSSOMETER
TRUCTURAL MECHANICA	L PROPERTIES				
Water Absorption		< 0.50%	< 0.05	%	ISO-10545-3
Apparent density		> 2.0 g/cc	> 2.10	g/cc	DIN 51082
MASSIVE MECHANICAL PI	ROPERTIES				
Modulus rupture		Min 35 N/mm	Min 40	N/mm ²	ISO-10545-3
Breaking Strenght		Min.1300 N	Min.20	00 N	ISO-10545-4
Impact resistance		As per mfg.	Min. 0.55		ISO-10545-5
SURFACE MECHANICAL PI	ROPERTIES				
Surface abrasion resistance		As per mfg.	Min Cla	iss 4	ISO-10545-7
MOH's hardness		As per mfg.			EN 101
THERMOHYDROMETRIC	PROPERTIES				
Frost resistance		No Damage	No Dar	nage	ISO-10545-12
Thermal shock resistance		No Damage	No Dar	nage	ISO-10545-9
Moisture expansion		Nil	Nil		ISO-10545-10
Thermal expansion (CEO)		Max.9.0x10 ⁶	Max.6.	5x10 ⁻⁶	ISO-10545-8
Crazing resistance		As per mfg.	Min 10	Cycle	ISO-10545-11
CHEMICAL PROPERTIES					
Chemical resistance		No Damage	No Dam	age	ISO-10545-13
Satin resistance		Resistance	Resistar	nce	ISO-10545-14
SAFETY PROPERTIES					
Slip resistance		As per mfg.	> 0.40		ISO-10545-17
Fire resistance		As per mfg.	Fire Pro	of	N.A.
Lead & Cadmium given off by glazed tiles		As per mfg.	Doesn't	yield PB & CD	ISO-10545-15
ACKING DETAILS					
SR. NO.	PRODUCT	NOMINAL SIZE	THICNESS	TILES PER BOX	COVERAGE AREA
1	GPT	60X120cm	0.9 cm	2	1.44 Sq. Mtr.